

1/9

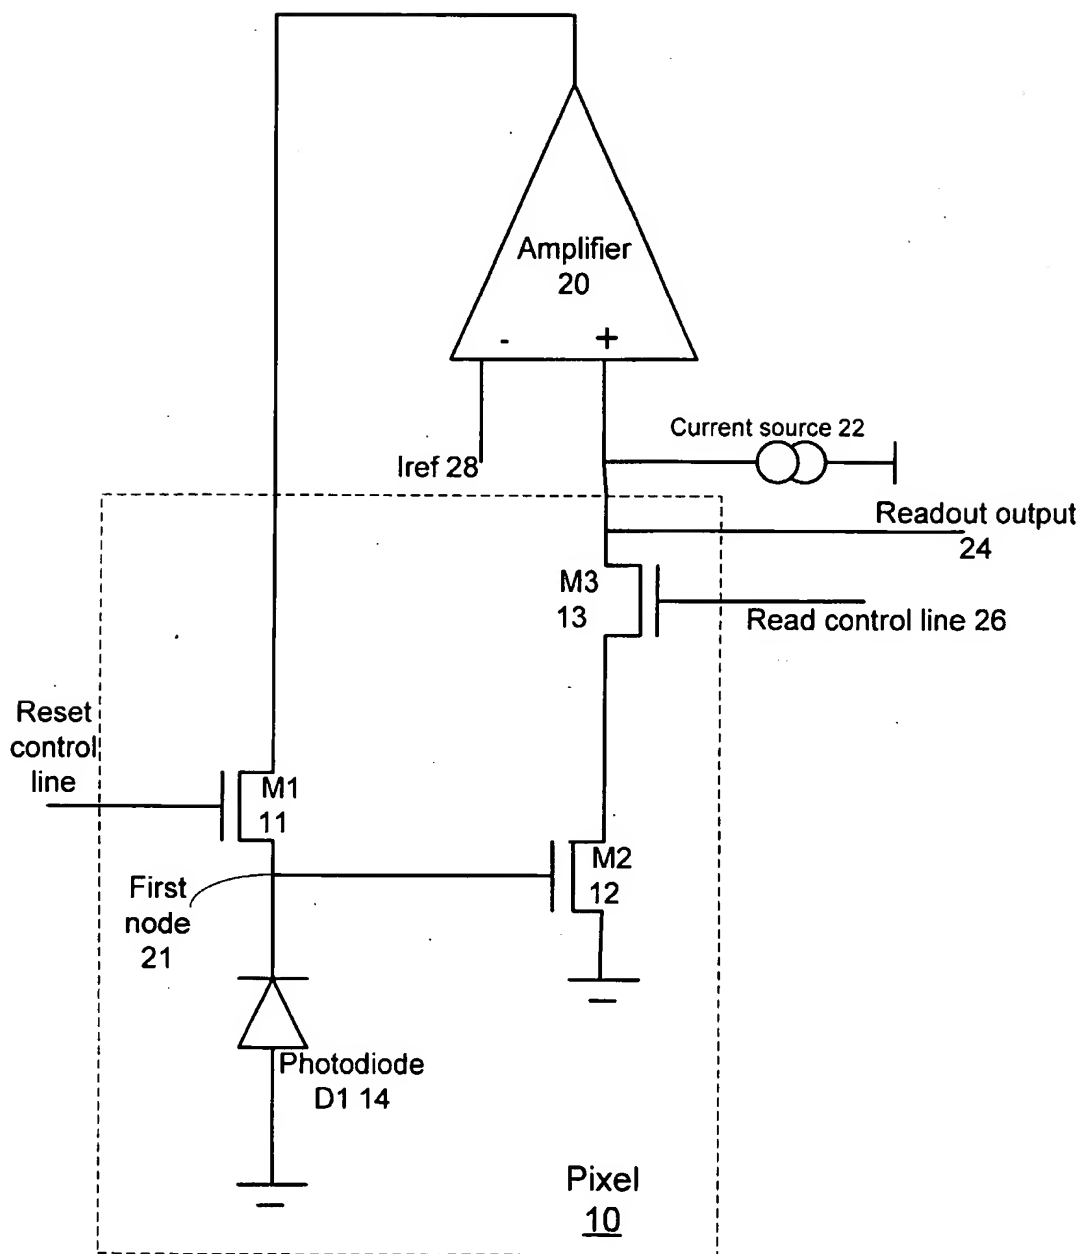


Figure 1

2/9

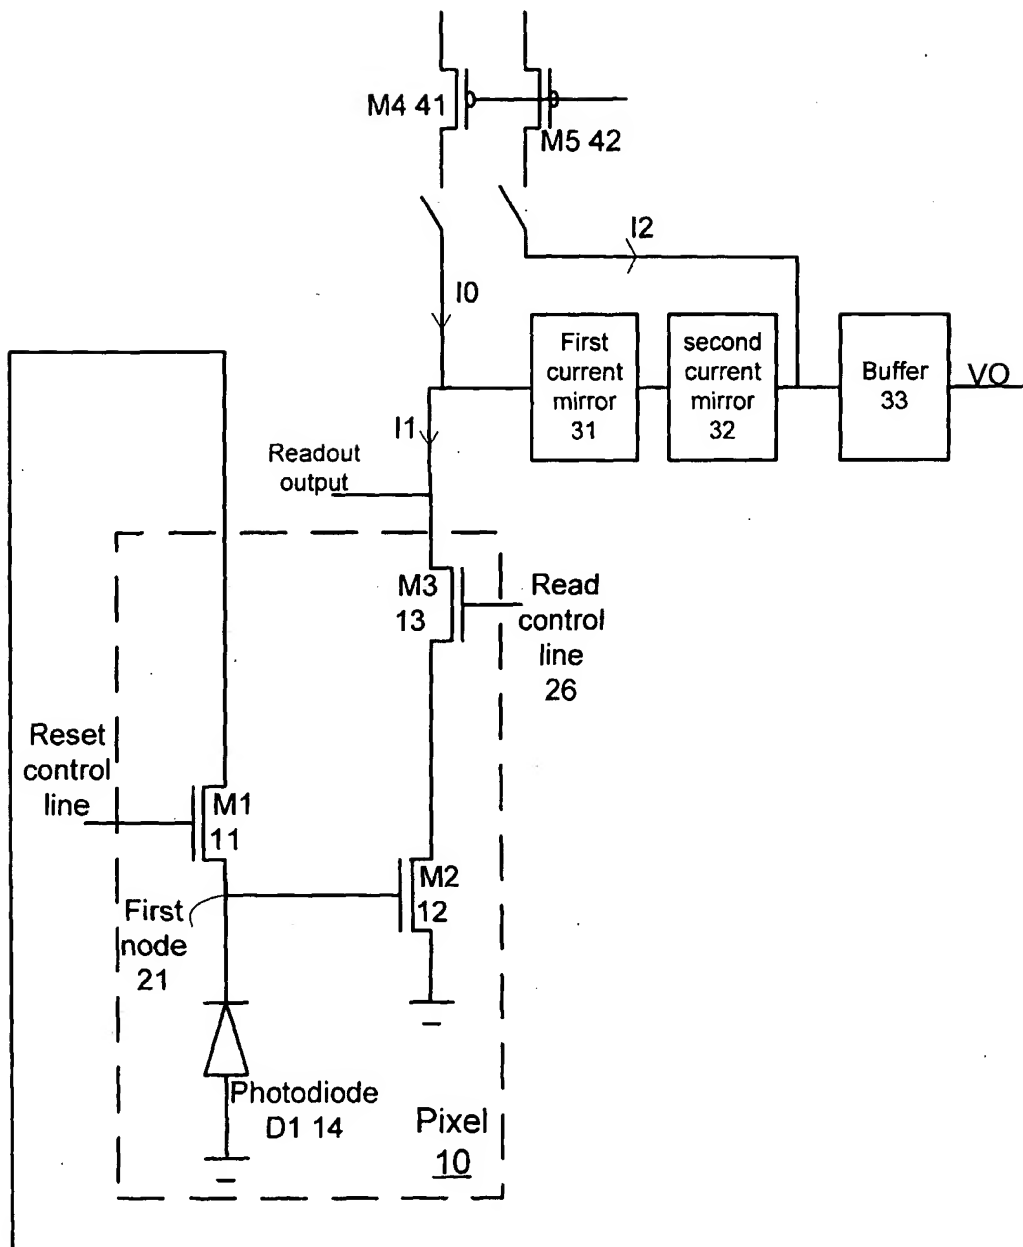


Figure 2

3/9

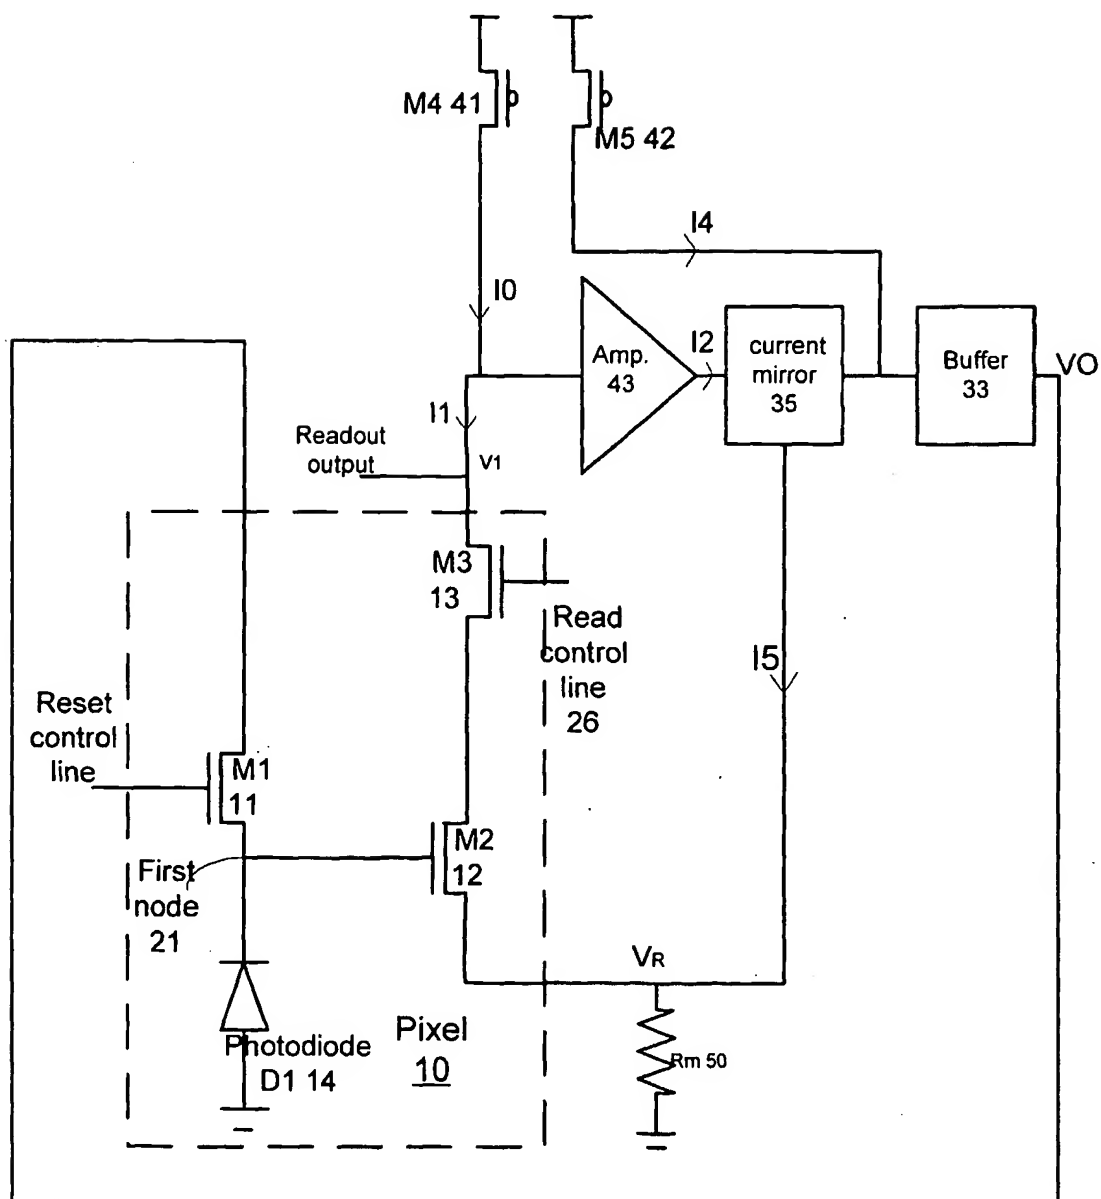


Figure 3

4/9

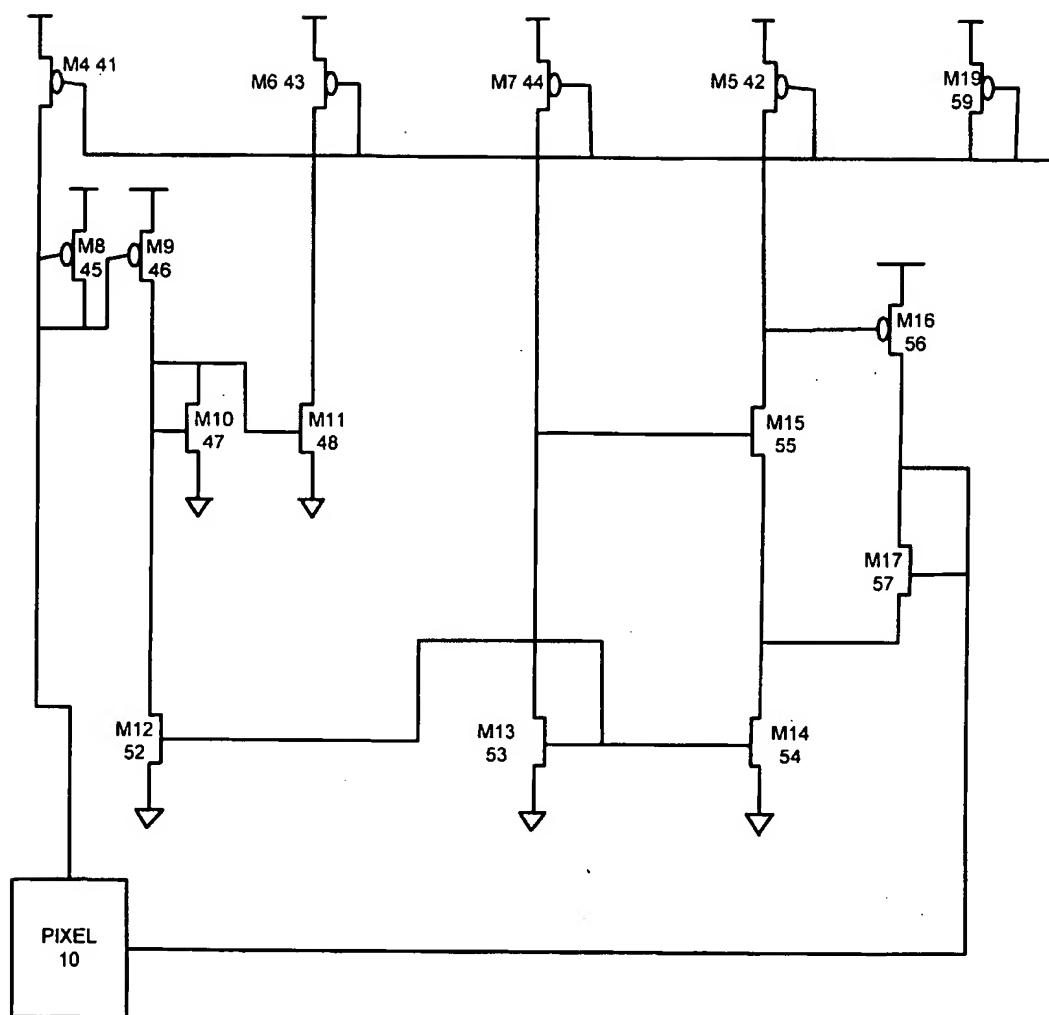


Figure 4

5/9

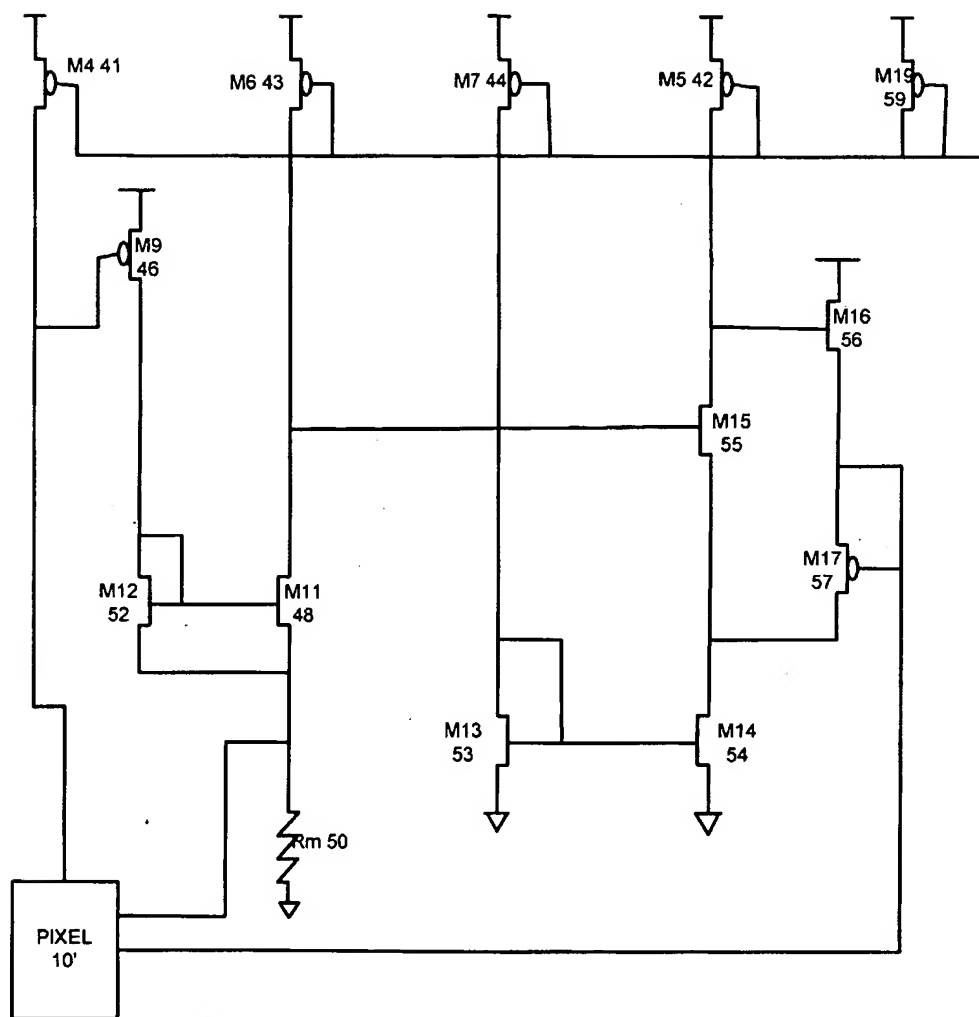


Figure 5

6/9

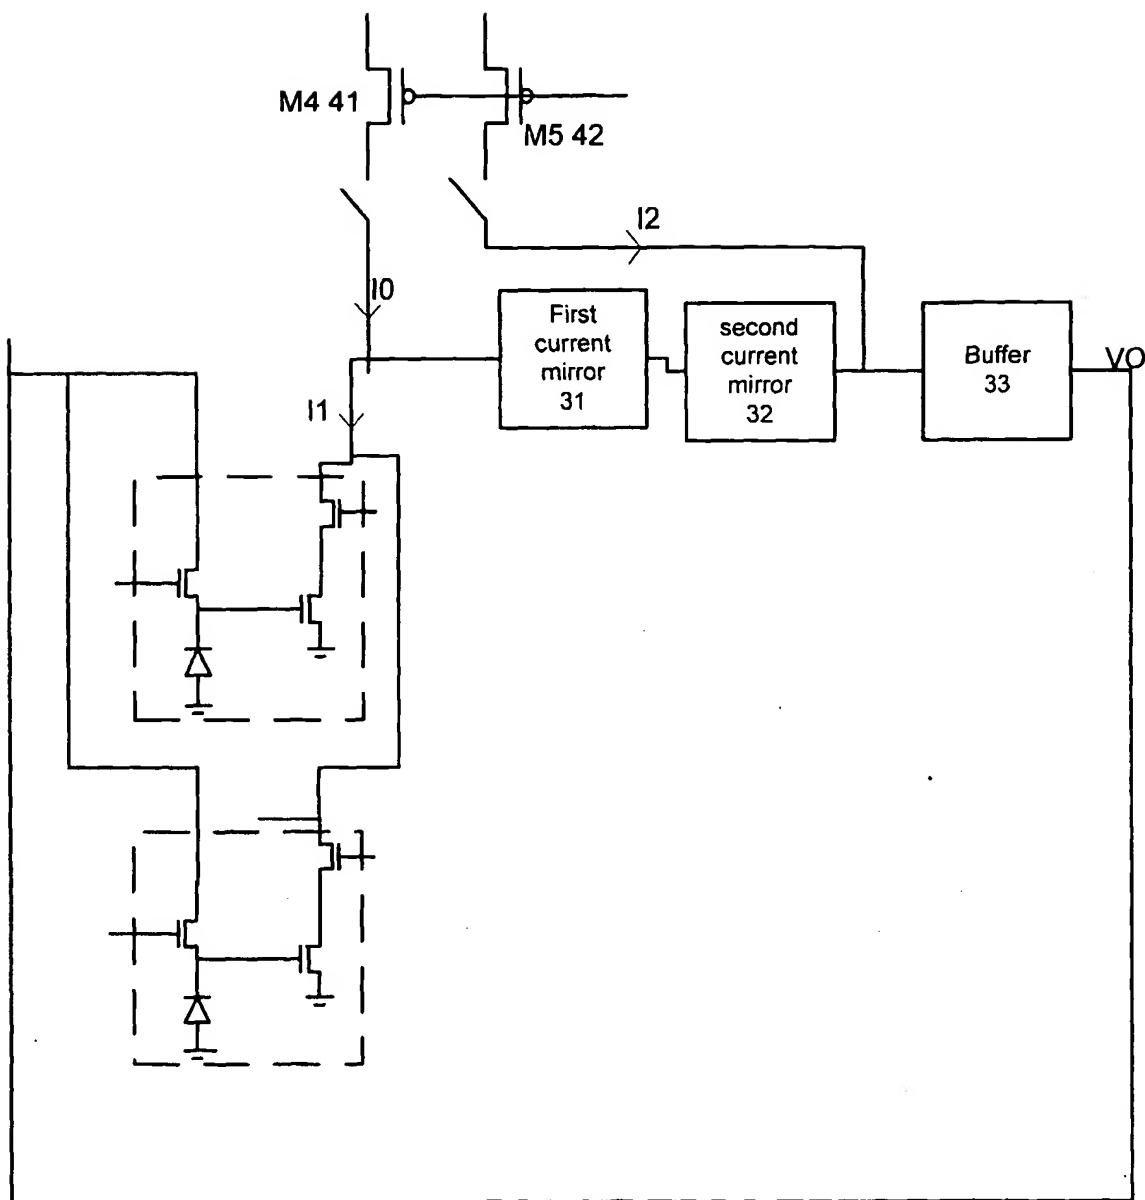


Figure 6

7/9

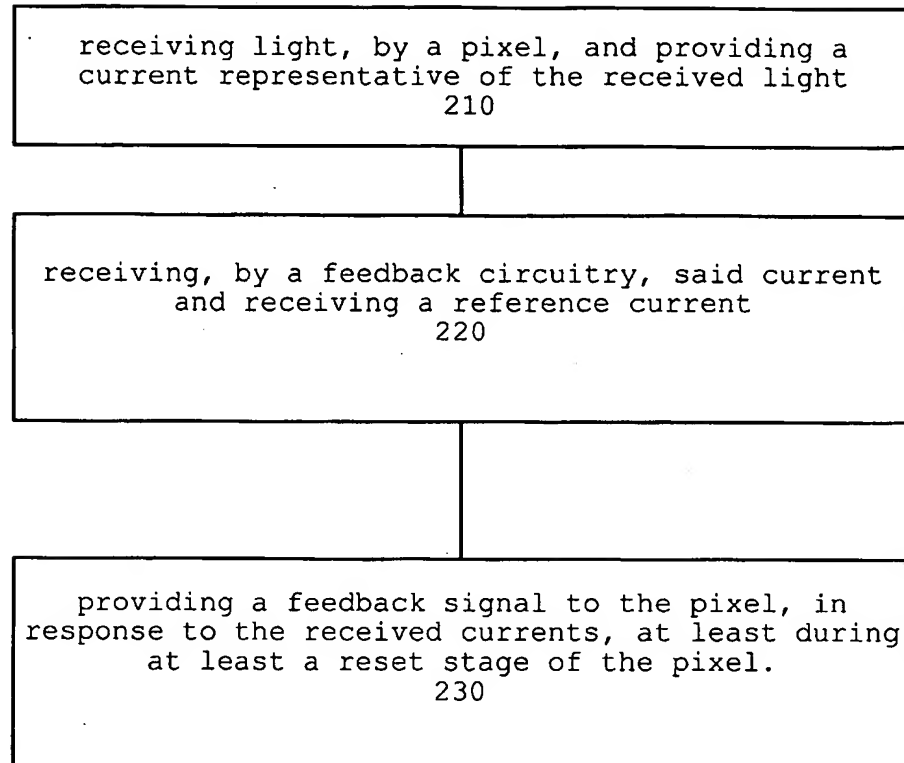
200

Figure 7

8/9

receiving light, by a pixel, and providing a pixel
output signal representative of the received light
310

receiving, by a feedback circuitry, the pixel
output signal
320

providing multiple feedback signals to the pixel
at least during a reset stage of the pixel.
330

300

Figure 8

9/9

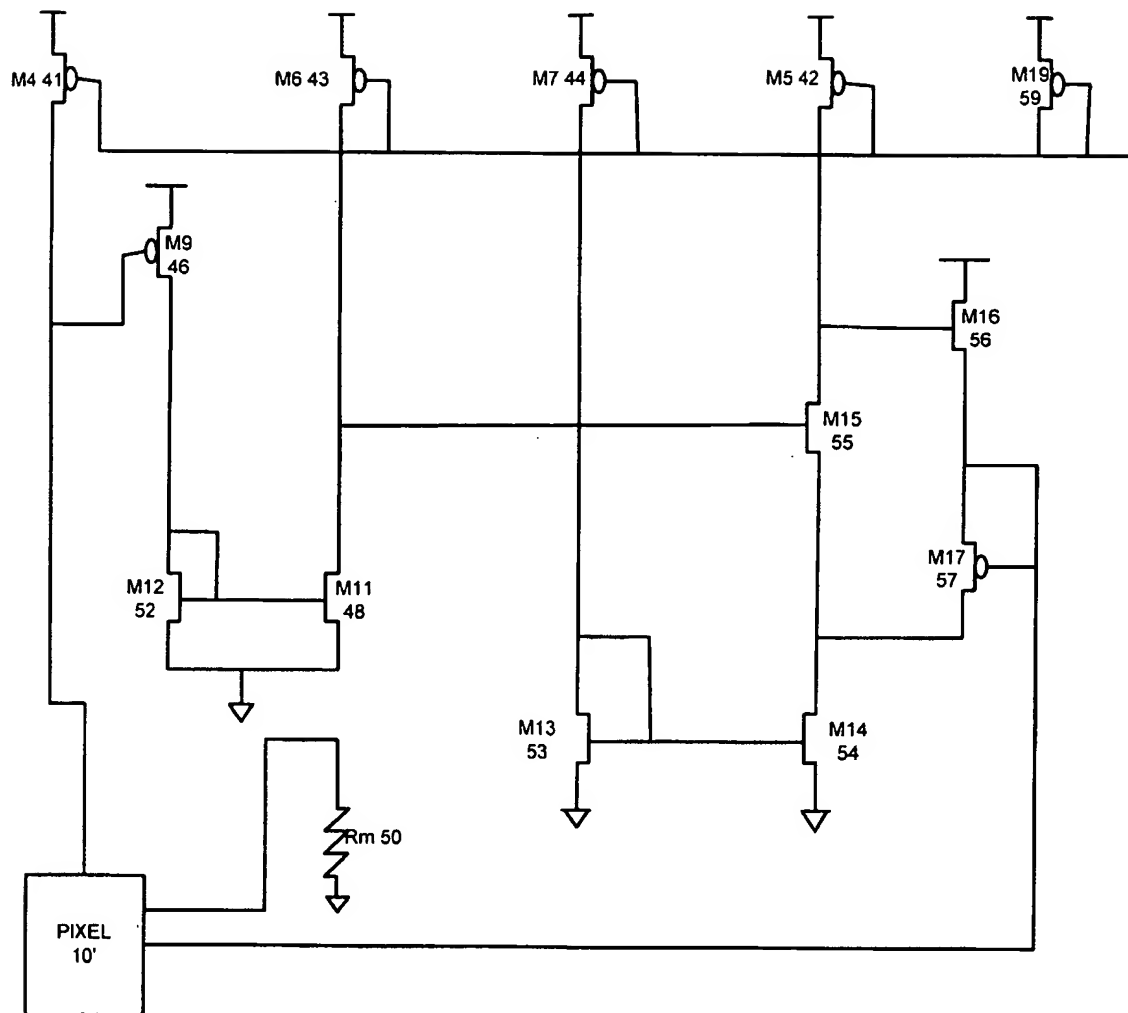


Figure 9